


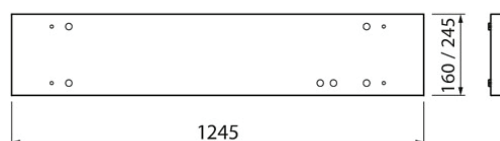





Arel

The extensive Arel luminaire range is designed for offices and other public spaces. The luminaires are equipped with a matt anti-glare shield. Suspension or surface mounting. The standard range includes two colour temperatures and sizes. Integrated LED. A wire-suspension fixture is available as an accessory (4107113).


- Steel housing, matt aluminium anti-glare shield.
- White, RAL 9003.
- Protection class I.
- Linkable, 3 x 2,5 mm², Dali-versions 5 x 2,5 mm².
- Installation height 2–4 m.
- Integrated LED Downlight version: 19–58 W / 2,150–6,850 lm.
- Uplight and downlight version: 54–79 W / 5,800–8,800 lm.
- Colour temperatures 3,000 K and 4,000 K. CRI > 80 / Ra > 80.
- MacAdam 3 SDCM.
- IP20.
- The standard range includes On/Off and Dali models.
- Ambient temperature range 0 ... 25 °C.
- Rated lifetime L70 100,000 h (Ta25°C).
- Rated lifetime L80 80,000 h (Ta25°C).
- Power source service life 50,000 h.
- WH = white, DA = Dali, AL = aluminium, MA = matt.
- Also available: Casambi, ActiveAhead, Philips SR, 1–10 V and Switch Dim solutions. CRI > 90 available for order. Also available with various connecting cable solutions and a pull switch (on/off and Dali). High gloss anti-glare shield, luminous flux packages 1900–7200 lm and gray color, RAL9007, also available on request.

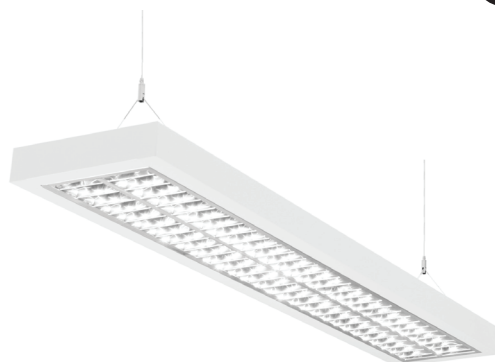

Arel 1245



Arel 1545



Wire suspension.

By order

Arel on/off

NO.	CODE	W	LM
4222731	D2ARFA	1245X160 IP20 19W/830 AL MA WH	19 2150
4222732	D2ARFB	1245X160 IP20 19W/840 AL MA WH	19 2150
4222733	D2ARMA	1245X245 IP20 26W/830 AL MA WH	26 3150
4222734	D2ARMB	1245X245 IP20 26W/840 AL MA WH	26 3150
4222735	D2ARGA	1245X245 IP20 37W/830 AL MA WH	37 4250
4222736	D2ARGB	1245X245 IP20 37W/840 AL MA WH	37 4250
4222720	D2ARLA	1545x160 IP20 30W/830 AL MA WH	30 3300
4222721	D2ARLB	1545x160 IP20 30W/840 AL MA WH	30 3300
4222722	D2ARHG	1545x245 IP20 41W/830 AL MA WH	41 5050
4222723	D2ARHH	1545x245 IP20 41W/840 AL MA WH	41 5050
4222725	D2ARHN	1545x245 IP20 58W/840 AL MA WH	58 6850
4222724	D2ARHM	1545x245 IP20 58W/830 AL MA WH	58 6850

Arel Dali

NO.	CODE	W	LM
	D2ARFA-DALI	1245X160 IP20 19W/830 DA AL MA WH	19 2150
	D2ARFB-DALI	1245X160 IP20 19W/840 DA AL MA WH	19 2150
	D2ARMA-DALI	1245X245 IP20 26W/830 DA AL MA WH	26 3150
	D2ARMB-DALI	1245X245 IP20 26W/840 DA AL MA WH	26 3150
	D2ARGA-DALI	1245X245 IP20 37W/830 DA AL MA WH	37 4250
	D2ARGB-DALI	1245X245 IP20 37W/840 DA AL MA WH	37 4250
	D2ARLA-DALI	1545x160 IP20 30W/830 DA AL MA WH	30 3300
	D2ARLB-DALI	1545x160 IP20 30W/840 DA AL MA WH	30 3300
	D2ARHH-DALI	1545x245 IP20 41W/840 DA AL MA WH	41 5050
	D2ARHG-DALI	1545x245 IP20 41W/830 DA AL MA WH	41 5050
	D2ARHM-DALI	1545x245 IP20 58W/830 DA AL MA WH	58 6850
	D2ARHN-DALI	1545x245 IP20 58W/840 DA AL MA WH	58 6850