



## Ballo

Elegant Ballo luminaires made from high-quality glass are an ideal choice for offices, lobbies and other public spaces. The range includes two round luminaires of a different diameter. Each model is available in two colour temperatures. Includes a two-metre cable and ceiling cup. The cable can be shortened to up to 150 mm.

- Steel housing and opal glass diffuser (GLO).
- Chrome.
- Protection class I.
- Suspension mounting. Suspension length 150–2,000 mm.
- Linkable, 3 x 2.5 mm<sup>2</sup>, Dali-2-models 5 x 2.5 mm<sup>2</sup>.
- Installation height 2–6 m
- Fixed LED: 20–39 W / 2,000–4,100 lm.
- Colour temperatures: 3,000 K and 4,000 K.  
CRI > 80 / Ra > 80.
- MacAdam 3 SDCM.
- IP20.
- On/off and Dali-2.
- Ambient temperature range 0 ... 25 °C.
- Rated lifetime L70 100,000 h (Ta25°C).
- Rated lifetime L80 65,000 h (Ta25°C).
- Power source service life 50,000 h.
- Also available as Casambi, 1–10 V and Switch Dim solutions.  
The colour temperature options available are: 2,700 K, 5,700 K and 6,500 K as well as Tunable White. CRI > 90 available by special order. Also available with various connecting wire solutions.

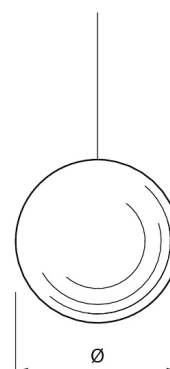

Ceiling cup.

### By order

#### Ballo on/off

NO.	CODE		W	LM
4289837	D2BAAA	200 IP20 20W/830 GLO	20	2000
4289838	D2BAAB	200 IP20 20W/840 GLO	20	2000
4289839	D2BABA	400 IP20 39W/830 GLO	39	4100
4289840	D2BABB	400 IP20 39W/840 GLO	39	4100

#### Ballo Dali

NO.	CODE		W	LM
	D2BAAA-DALI	200 IP20 20W/830 DA2 GLO	20	2000
	D2BAAB-DALI	200 IP20 20W/840 DA2 GLO	20	2000
	D2BABA-DALI	400 IP20 39W/830 DA2 GLO	39	4100
	D2BABB-DALI	400 IP20 39W/840 DA2 GLO	39	4100