




Compact Fix

Compact Fix is a high-quality downlight for general lighting in residential buildings and public spaces. Typical applications include hotels, restaurants, lobbies and wet spaces. Compact Fix Dim -versions can be installed directly on the insulation material. The luminaire can be installed on a 22-mm rail. All models are dimmable.

- Die-cast aluminium housing and acrylic diffuser
- White powder-coated, RAL9010.
- Protection class II.
- Recessed mounting on a ceiling, cut out \varnothing 68–70 mm.
- Linkable, max 3 x 1,5 mm², Dali-2-models 5 x 2,5 mm².
- Installation height 2–6 m.
- Beam angle 36°.
- Colour temperatures 3,000 K and 4,000 K.
- MacAdam 3 SDCM.
- IP20/IP65.
- IK02.
- Integrated LED 5 W / 400 lm.
- Dimming: rising- and trailing-edge control; Dali-2 with push-button control (230 V) and Casambi.
- Ambient temperature range 0 ... 25 °C.
- Rated life time L70 90,000 h (Ta25°C).
- Rated life time L80 60,000 h (Ta25°C).

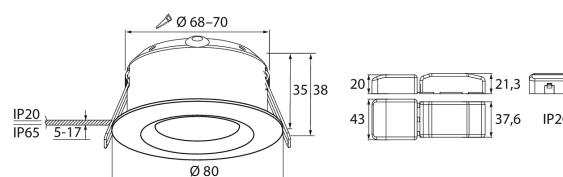

By order, • in stock

Compact Fix Dim

NO.	CODE		W	LM
• 4107619	A1CODA	IP65 5W/830 36D DIM ACC WH	5	400
• 4107622	A1CODB	IP65 5W/840 36D DIM ACC WH	5	400

Compact Fix Dali

NO.	CODE		W	LM
	A1CODA-DALI	IP65 5W/830 36D DA2 ACC WH	5	400
	A1CODB-DALI	IP65 5W/840 36D DA2 ACC WH	5	400

Compact Fix Casambi

NO.	CODE		W	LM
	A1CODA-CA	IP65 5W/830 36D CA ACC WH	5	400
	A1CODB-CA	IP65 5W/840 36D CA ACC WH	5	400

