

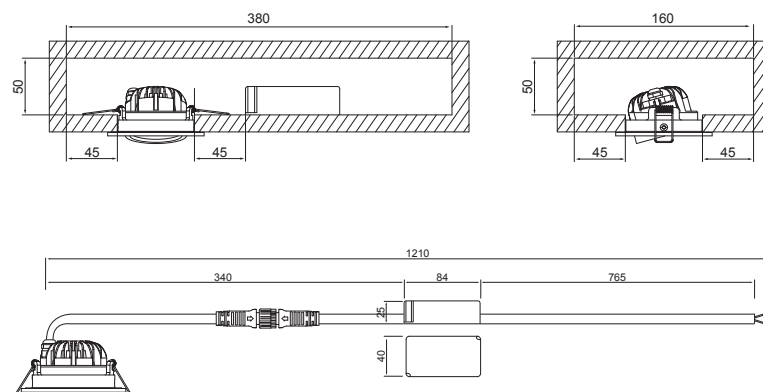




Compact Outdoor

Compact Outdoor is an adjustable downlight range, with full IP65 classification. The luminaires are particularly well suited for use in wet spaces and on exterior surfaces, eaves and open shuttering, as well as terrace roof structures. Colour temperatures: 3000 K and 4000 K. The luminaire is dimmable.

- Aluminium housing and acrylic diffuser.
- White powder-coated, RAL 9010. Black powder-coated, RAL 9005.
- Protection class II.
- Recessed mounting on a ceiling.
- Connecting wire 2 x 0.75 mm². Connection in a separate box.
- Installation height 2–4 m.
- Adjustable, can be turned +/-15 degrees.
- Colour temperatures 3000 K and 4000 K. CRI > 80 / Ra > 80.
- MacAdam 3 SDCM.
- IP65/IP65.
- IK03.
- Integrated LED 5 W / 500 lm.
- Dimming: rising- and trailing-edge control.
- Ambient temperature range -20 ... 25 °C.
- Rated lifetime L70 100 000 h.
- Rated lifetime L80 65 000 h.
- Power source service life 50 000 h.

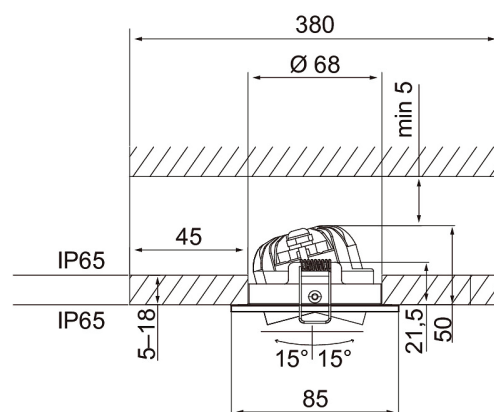

• In stock

Compact Outdoor Dim

NO.	CODE	W	LM
• 4146547	A1COMA Tilt IP65 5W/840 36D DIM ACC W	5	500
• 4146548	A1COMB Tilt IP65 5W/830 36D DIM ACC W	5	500
• 4146549	A1COMC Tilt IP65 5W/840 36D DIM ACC B	5	500
• 4146550	A1COMD Tilt IP65 5W/830 36D DIM ACC B	5	500

