





Compact Tilt

Compact Tilt is a high-quality adjustable downlight for general lighting in residential buildings and public spaces. This adjustable unit is suitable both for general lighting and for highlighting details. It is dimmable, which offers additional options for atmospheric lighting in the space. Typical applications include hotels, restaurants, lobbies and wet spaces. With three housing-colour options and two colour temperatures, you can select the models that best suit your needs. Compact Tilt Dim models can be mounted directly in the insulation material. The 5 W models can be installed in a ceiling space of 22 mm.



- Die-cast aluminium housing and acrylic diffuser.
- White, powder-coated RAL9010, black powder-coated RAL 9005 and satin nickel.
- Protection class II.
- Recessed mounting on a ceiling. Cut out in 5W models Ø 68–70 mm and in 7W models Ø 75–80 mm.
- Linkable, max 3 x 1,5 mm², Dali-2-models 5 x 2,5 mm².
- Installation height 2–6 m.
- Beam angle 36°.
- Colour temperatures 3,000 K and 4,000 K.
- MacAdam 3 SDCM.
- IP20/IP44.
- IK02.
- Integrated LED 5 W / 400 lm, 7 W / 600 lm.
- Dimming: rising- and trailing-edge control, Dali-2 with push-button control (230 V) and Casambi.
- Ambient temperature range 0 ... 25 °C.
- Rated life time L70 90,000 h (Ta25°C).
- Rated life time L80 60,000 h (Ta25°C).

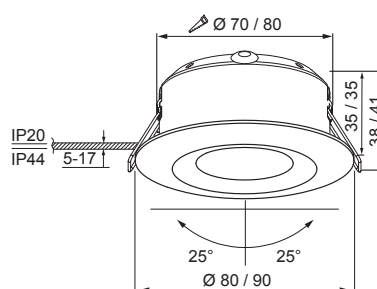

Compact Tilt 5W



Compact Tilt 7W

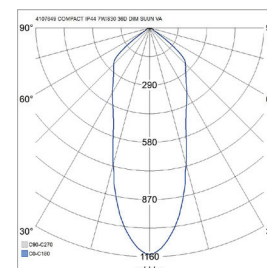

By order, • in stock, * new product

Compact Tilt

NO.	CODE		W	LM
• 4107625	A1CODC	IP44 5W/830 36D DIM ACC WH	5	400
• 4107640	A1CODO	IP44 5W/840 36D DIM ACC WH	5	400
• 4107649	A1CODE	IP44 7W/830 36D DIM ACC WH	7	600
• 4107651	A1CODF	IP44 7W/840 36D DIM ACC WH	7	600
• 4146695	A1CODM	IP44 5W/830 36D DIM ACC BK	5	400
• 4146696	A1CODN	IP44 5W/840 36D DIM ACC BK	5	400
• 4146697	A1CODO	IP44 7W/830 36D DIM ACC BK	7	600
• 4146698	A1CODP	IP44 7W/840 36D DIM ACC BK	7	600
• 4126272	A1CODG	IP44 5W/830 36D DIM ACC SAT	5	400
• 4126273	A1CODH	IP44 5W/840 36D DIM ACC SAT	5	400
• 4126274	A1CODI	IP44 7W/830 36D DIM ACC SAT	7	600
• 4126275	A1CODJ	IP44 7W/840 36D DIM ACC SAT	7	600

Compact Tilt Dali

NO.	CODE		W	LM
	A1CODC-DALI	IP44 5W/830 36D DA2 ACC WH	5	400
	A1CODO-DALI	IP44 5W/840 36D DA2 ACC WH	5	400
	A1CODE-DALI	IP44 7W/830 36D DA2 ACC WH	7	600
	A1CODF-DALI	IP44 7W/840 36D DA2 ACC WH	7	600
*	A1CODM-DALI	IP44 5W/830 36D DA2 ACC BK	5	400

*	A1CODN-DALI	IP44 5W/840 36D DA2 ACC BK	5	400
*	A1CODO-DALI	IP44 7W/830 36D DA2 ACC BK	7	600
*	A1CODP-DALI	IP44 7W/840 36D DA2 ACC BK	7	600
	A1CODG-DALI	IP44 5W/830 36D DA2 ACC SAT	5	400
	A1CODH-DALI	IP44 5W/840 36D DA2 ACC SAT	5	400
	A1CODI-DALI	IP44 7W/830 36D DA2 ACC SAT	7	600
	A1CODJ-DALI	IP44 7W/840 36D DA2 ACC SAT	7	600

Compact Tilt Casambi

NO.	CODE		W	LM
	A1CODC-CA	IP44 5W/830 36D CA ACC WH	5	400
	A1CODO-CA	IP44 5W/840 36D CA ACC WH	5	400
	A1CODE-CA	IP44 7W/830 36D CA ACC WH	7	600
	A1CODF-CA	IP44 7W/840 36D CA ACC WH	7	600
*	A1CODM-CA	IP44 5W/830 36D CA ACC BK	5	400
*	A1CODN-CA	IP44 5W/840 36D CA ACC BK	5	400
*	A1CODO-CA	IP44 7W/830 36D CA ACC BK	7	600
*	A1CODP-CA	IP44 7W/840 36D CA ACC BK	7	600
	A1CODG-CA	IP44 5W/830 36D CA ACC SAT	5	400
	A1CODH-CA	IP44 5W/840 36D CA ACC SAT	5	400
	A1CODI-CA	IP44 7W/830 36D CA ACC SAT	7	600
	A1CODJ-CA	IP44 7W/840 36D CA ACC SAT	7	600