
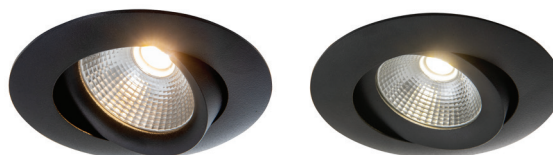



Compact Tilt

Compact Tilt is a high-quality adjustable downlight for general lighting in residential buildings and public spaces. This adjustable unit is suitable both for general lighting and for highlighting details. It is dimmable, which offers additional options for atmospheric lighting in the space. Typical applications include hotels, restaurants, lobbies and wet spaces. With three housing-colour options and two colour temperatures, you can select the models that best suit your needs. Compact Tilt Dim models can be mounted directly in the insulation material. The 5 W models can be installed in a ceiling space of 22 mm.

- Die-cast aluminium housing and acrylic diffuser.
- White, powder-coated RAL 9010, black powder-coated RAL 9005 and satin nickel.
- Protection class II.
- Recessed mounting on a ceiling. Cut out in 5 W models Ø 68–70 mm and in 7 W models Ø 75–80 mm.
- Linkable, max 3 x 1,5 mm², Dali-2-models 5 x 2,5 mm².
- Installation height 2–6 m.
- Beam angle 36°.
- Colour temperatures 3000 K and 4000 K.
- MacAdam 3 SDCM.
- IP20/IP44.
- IK02.
- Integrated LED 5 W / 400 lm, 7 W / 600 lm.
- Dimming: rising- and trailing-edge control, Dali-2 with push-button control (230 V) and Casambi.
- Ambient temperature range 0 ... 25 °C.
- Rated life time L70 90 000 h (Ta25°C).
- Rated life time L80 60 000 h (Ta25°C).

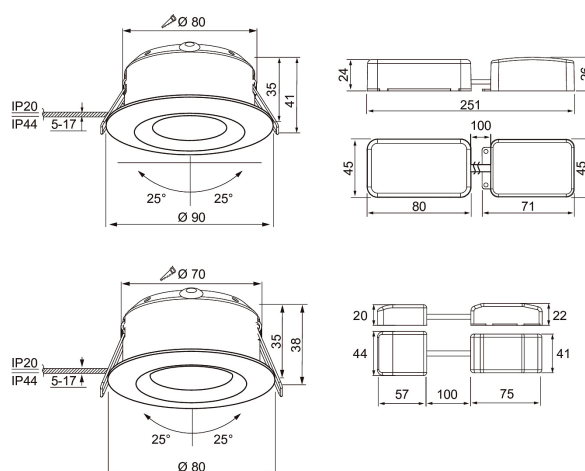

Color temperatures 3000 K and 4000 K.



By order • In stock

Compact Tilt Dim

NO.	CODE		W	LM
• 4107625	A1CODC	IP44 5W/830 36D DIM ACC WH	5	400
• 4107640	A1Codd	IP44 5W/840 36D DIM ACC WH	5	400
• 4107649	A1CODE	IP44 7W/830 36D DIM ACC WH	7	600
• 4107651	A1C0DF	IP44 7W/840 36D DIM ACC WH	7	600
• 4146695	A1CODM	IP44 5W/830 36D DIM ACC BK	5	400
• 4146696	A1CODN	IP44 5W/840 36D DIM ACC BK	5	400
• 4146697	A1CODO	IP44 7W/830 36D DIM ACC BK	7	600
• 4146698	A1C0DP	IP44 7W/840 36D DIM ACC BK	7	600
• 4126272	A1C0DG	IP44 5W/830 36D DIM ACC SAT	5	400
• 4126273	A1C0DH	IP44 5W/840 36D DIM ACC SAT	5	400
• 4126274	A1C0DI	IP44 7W/830 36D DIM ACC SAT	7	600
• 4126275	A1C0DJ	IP44 7W/840 36D DIM ACC SAT	7	600

Compact Tilt Dali

NO.	CODE		W	LM
	A1CODC-DALI	IP44 5W/830 36D DA2 ACC WH	5	400
	A1Codd-DALI	IP44 5W/840 36D DA2 ACC WH	5	400
	A1CODE-DALI	IP44 7W/830 36D DA2 ACC WH	7	600
	A1C0DF-DALI	IP44 7W/840 36D DA2 ACC WH	7	600
	A1CODM-DALI	IP44 5W/830 36D DA2 ACC BK	5	400
	A1CODN-DALI	IP44 5W/840 36D DA2 ACC BK	5	400
	A1CODO-DALI	IP44 7W/830 36D DA2 ACC BK	7	600
	A1C0DP-DALI	IP44 7W/840 36D DA2 ACC BK	7	600
	A1C0DG-DALI	IP44 5W/830 36D DA2 ACC SAT	5	400
	A1C0DH-DALI	IP44 5W/840 36D DA2 ACC SAT	5	400
	A1C0DI-DALI	IP44 7W/830 36D DA2 ACC SAT	7	600
	A1C0DJ-DALI	IP44 7W/840 36D DA2 ACC SAT	7	600

Compact Tilt Casambi

NO.	CODE		W	LM
	A1CODC-CA	IP44 5W/830 36D CA ACC WH	5	400
	A1Codd-CA	IP44 5W/840 36D CA ACC WH	5	400
	A1CODE-CA	IP44 7W/830 36D CA ACC WH	7	600
	A1C0DF-CA	IP44 7W/840 36D CA ACC WH	7	600
	A1CODM-CA	IP44 5W/830 36D CA ACC BK	5	400
	A1CODN-CA	IP44 5W/840 36D CA ACC BK	5	400
	A1CODO-CA	IP44 7W/830 36D CA ACC BK	7	600
	A1C0DP-CA	IP44 7W/840 36D CA ACC BK	7	600
	A1C0DG-CA	IP44 5W/830 36D CA ACC SAT	5	400
	A1C0DH-CA	IP44 5W/840 36D CA ACC SAT	5	400
	A1C0DI-CA	IP44 7W/830 36D CA ACC SAT	7	600
	A1C0DJ-CA	IP44 7W/840 36D CA ACC SAT	7	600

