
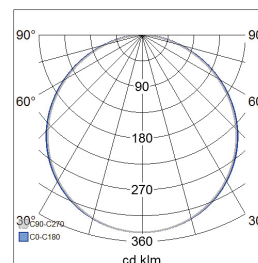


## Flat Sq

Luminaires in the Flat Sq downlight range are suitable for mounting on a low ceiling structure. They are designed for use in bathrooms, corridors and lobbies. The luminaire is dimmable. Equipped with spring terminal blocks, these luminaire can also be linked.

- Aluminium body and polycarbonate diffuser.
- White, RAL9003.
- Protection class II.
- Recessed mounting on a ceiling.
- Linkable, max 3 x 2,5 mm<sup>2</sup>, Dali-2-models 5 x 2,5 mm<sup>2</sup>.
- Colour temperatures 3,000 K and 4,000 K.  
CRI > 80 / Ra > 80.
- MacAdam 4 SDCM.
- IP20/IP44.
- Fixed LED 9 W / 500 lm, 12 W / 900 lm, 15 W / 1,300 lm.
- Dimming: trailing-edge control, Dali-2 with push-button control (230 V) and Casambi.
- Ambient temperature range 0 ... 25 °C.
- Rated lifetime L70 50 000 h (Ta25°C).
- Power source lifetime 50,000 h.

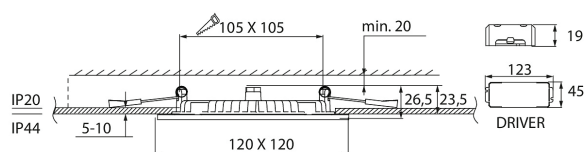

By order, • in stock

### Flat Sq Dim

| NO.       | CODE   |                             | W  | LM   |
|-----------|--------|-----------------------------|----|------|
| • 4297885 | A2FLGG | 120 IP44 9W/830 DIM PCO WH  | 9  | 500  |
| • 4297886 | A2FLGH | 120 IP44 9W/840 DIM PCO WH  | 9  | 500  |
| • 4297887 | A2FLGI | 175 IP44 12W/830 DIM PCO WH | 12 | 900  |
| • 4297888 | A2FLGJ | 175 IP44 12W/840 DIM PCO WH | 12 | 900  |
| • 4297889 | A2FLGK | 225 IP44 15W/830 DIM PCO WH | 15 | 1300 |
| • 4297890 | A2FLGL | 225 IP44 15W/840 DIM PCO WH | 15 | 1300 |

### Flat Sq Dali

| NO. | CODE        |                             | W  | LM   |
|-----|-------------|-----------------------------|----|------|
|     | A2FLGG-DALI | 120 IP44 9W/830 DA2 PCO WH  | 9  | 500  |
|     | A2FLGH-DALI | 120 IP44 9W/840 DA2 PCO WH  | 9  | 500  |
|     | A2FLGI-DALI | 175 IP44 12W/830 DA2 PCO WH | 12 | 900  |
|     | A2FLGJ-DALI | 175 IP44 12W/840 DA2 PCO WH | 12 | 900  |
|     | A2FLGK-DALI | 225 IP44 15W/830 DA2 PCO WH | 15 | 1300 |
|     | A2FLGL-DALI | 225 IP44 15W/840 DA2 PCO WH | 15 | 1300 |

### Flat Sq Casambi

| NO. | CODE      |                            | W  | LM   |
|-----|-----------|----------------------------|----|------|
|     | A2FLGG-CA | 120 IP44 9W/830 CA PCO WH  | 9  | 500  |
|     | A2FLGH-CA | 120 IP44 9W/840 CA PCO WH  | 9  | 500  |
|     | A2FLGI-CA | 175 IP44 12W/830 CA PCO WH | 12 | 900  |
|     | A2FLGJ-CA | 175 IP44 12W/840 CA PCO WH | 12 | 900  |
|     | A2FLGK-CA | 225 IP44 15W/830 CA PCO WH | 15 | 1300 |
|     | A2FLGL-CA | 225 IP44 15W/840 CA PCO WH | 15 | 1300 |