



Flood

The Flood range offers cost-efficient, durable lighting solutions for demanding applications. The luminaires have an impact rating of IK08. With the asymmetric models, you can create high-quality area lighting for car parks, sports fields and yards. The luminaires are quick and easy to install without the need to remove the handle. A fixture for mounting the luminaire on a Ø 60 mm pole is available as an accessory.

- Pressure-cast aluminium body and hardened glass diffuser.
- Turning radius: +/-90 degrees.
- Grey, RAL 9006.
- Protection class I.
- Mounting on a wall or a beam, mounting on a 60 mm straight pole with a special fixture. The adapter does not include the M10X25 bolts for pole mounting.
- Not linkable, 3 x 1.5 mm². Dali-2-model 5 x 1,5 mm².
- Wind catchment area 40–80 W 0.1 m² / 100–150 W 0.14 m² / 180–240 W 0.2 m².
- Colour temperature 4,000 K. CRI > 70 / Ra > 70.
- MacAdam 5 SDCM.
- IP66.
- IK08.
- Fixed LED 40 W / 5,400 lm, 80 W / 10,800 lm, 150 W / 20,200 lm, 200 W / 27,000 lm.
- On/off 40–200 W, Dali-2 and Casambi 200 W.
- Ambient temperature range -30 ... 25 °C.
- Rated lifetime L70 100 000 h (Ta35°C).
- Rated lifetime L80 60 000 h (Ta25°C).
- Surge protection 10 kV.
- Ventilation to prevent frost.
- Available with project-specific connecting wires.

By order, • In stock

Flood Asym




NO.	CODE		W	LM
• 4513135	A5VAHB	IP66 IK08 40W/740 Asym GLC GR	40	5400
• 4513137	A5VAHD	IP66 IK08 80W/740 Asym GLC GR	80	10800
• 4513139	A5VAHF	IP66 IK08 150W/740 Asym GLC GR	150	20200
• 4513141	A5VAHH	IP66 IK08 200W/740 Asym GLC GR	200	27000

Flood Dali asym

NO.	CODE		W	LM
	A5VAHH-DALI	IP66 IK08 200W/740 Asym DA2 GLC GR	200	27000

Flood Casambi asym

NO.	CODE		W	LM
	A5VAHH-CA	IP66 IK08 200W/740 Asym CA GLC GR	200	27000

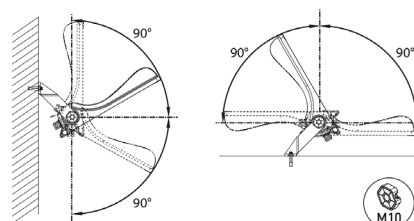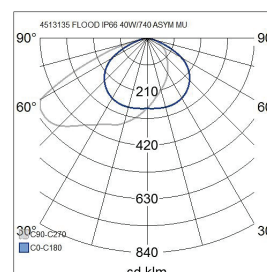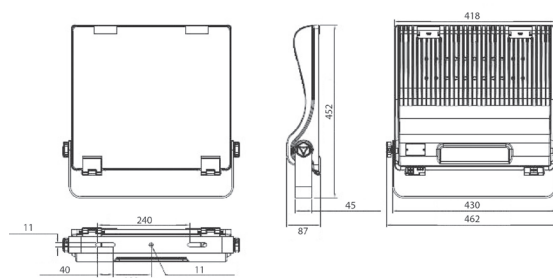

4513144 Flood Pole mount bracket 60mm

