

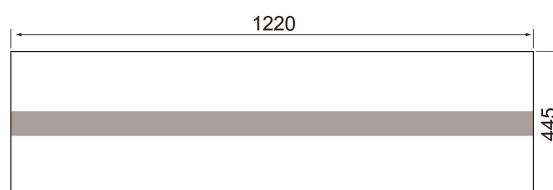


Fly

This elegant office luminaire is suitable for suspension mounting and provides evenness in up- and down-lighting. Light distribution is realised with the side panels on either side of the body. Integrated LED.

- Steel housing, transparent acrylic side panels.
- Silver, RAL 9006.
- Protection class I.
- Suspension mounting.
- Linkable, 3/5 x 2.5 mm².
- Installation height 2–4 m.
- Integrated LED 58–78 W / 6200–8000 lm.
- Colour temperatures 3000 K and 4000 K.
CRI > 80 / Ra > 80.
- MacAdam 3 SDCM.
- IP20.
- The standard range includes on/off and Dali models.
- Ambient temperature range 0 ... 25 °C.
- Rated lifetime L70 100 000 h (Ta25°C).
- Rated lifetime L80 80 000 h (Ta25°C).
- Power source service life 50 000 h.
- SI = silver, DA = Dali.
- Also available: Casambi, ActiveAhead, Philips SR, 1–10 V and Switch Dim solutions. CRI > 90 available for order. Also available with various connecting wire solutions.

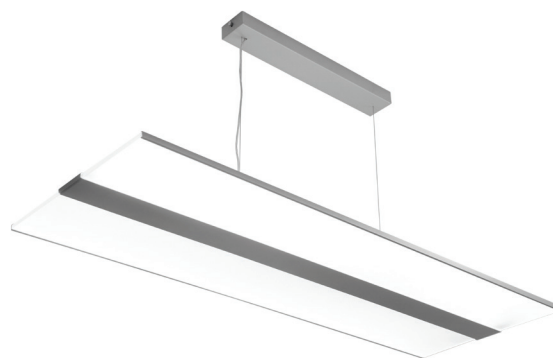

By order

Fly

NO.	CODE	W	LM
4209587	D2FYAC FLY D/I 63W/830 SI	63	5800
4209588	D2FYBC FLY D/I 63W/840 SI	63	5800
4209591	D2FYAE FLY D/I 77W/830 SI	77	7100
4209592	D2FYBE FLY D/I 77W/840 SI	77	7100

Fly Dali

NO.	CODE	W	LM
4209589	D2FYAD FLY D/I 63W/830 SI DA	63	5800
4209590	D2FYBD FLY D/I 63W/840 SI DA	63	5800
4209593	D2FYAF FLY D/I 77W/830 SI DA	77	7100
4209594	D2FYBF FLY D/I 77W/840 SI DA	77	7100