



Futura Abs

A LED luminaire designed for agricultural buildings, cattle shelters, industrial facilities, warehouses and parking facilities. The ABS housing and acrylic diffuser are resistant to ammoniac fumes, lye and alkaline compounds. Meets the requirements for low ambient temperatures, D classification. Wall brackets and lighting track brackets are available as accessories. Please also read about the other luminaires in the Futura range: Futura PC, Futura NB ja Futura Max.

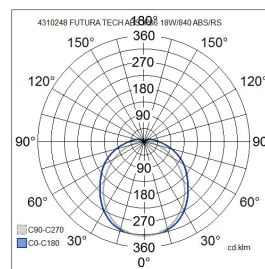

- ABS plastic housing, opal acrylic diffuser and stainless steel latches.
- Grey.
- Protection class I.
- Surface mounting.
- Throughwired, 5 x 2.5 mm². 612 mm models suitable for throughwiring 5 x 2.5 mm².
- Installation height 2–10 m.
- Integrated LED 16–71 W / 2300–10 600 lm.
- Colour temperature 4,000 K. CRI > 80 / Ra > 80.
- MacAdam 3 SDCM.
- IP66.
- The standard range includes on/off and Dali-2 models.
- Ambient temperature range -25 ... 45 °C.
- Rated lifetime L70 100,000 h (Ta45°C).
- Rated lifetime L80 100,000 h (Ta45°C).
- Rated lifetime L90 50 000 h (Ta45°C).
- Power source service life 100 000 h.
- AC = acrylic diffuser, DA2 = Dali-2.
- Casambi, 1-10V, Switch DIM and Radar available on a project-specific basis. CRI > 90 available for order.

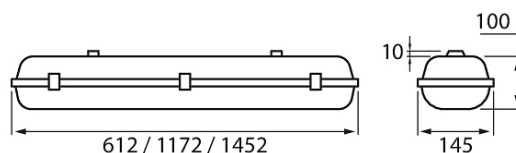

By order, • in stock

Futura Abs L612 W145

NO.	CODE		W	LM
4338547	T3FABA	IP66 IK06 16W/840 ACO Abs	16	2300
4338548	T3FABB	IP66 IK06 19W/840 ACO Abs	19	2700
4338549	T3FABC	IP66 IK06 27W/840 ACO Abs	27	3900

Futura Abs L1172 W145

NO.	CODE		W	LM
4338550	T3FABD	IP66 IK06 31W/840 ACO Abs	31	4500
4338551	T3FABE	IP66 IK06 37W/840 ACO Abs	37	5500
4338554	T3FABH	IP66 IK06 51W/840 ACO Abs	51	7700

Futura Abs L1452 W145

NO.	CODE		W	LM
4338552	T3FABF	IP66 IK06 38W/840 ACO Abs	38	5600
4338553	T3FABG	IP66 IK06 46W/840 ACO Abs	46	6800
4338555	T3FABI	IP66 IK06 71W/840 ACO Abs	71	10600

Futura Abs Dali L612 W145

NO.	CODE		W	LM
4338556	T3FABA-DALI	IP66 IK06 16W/840 DA2 ACO Abs	16	2300
4338557	T3FABB-DALI	IP66 IK06 19W/840 DA2 ACO Abs	19	2700
4338558	T3FABC-DALI	IP66 IK06 27W/840 DA2 ACO Abs	27	3900

Futura Abs Dali L1172 W145

NO.	CODE		W	LM
4338559	T3FABD-DALI	IP66 IK06 31W/840 DA2 ACO Abs	31	4500
4338560	T3FABE-DALI	IP66 IK06 37W/840 DA2 ACO Abs	37	5500
4338563	T3FABH-DALI	IP66 IK06 51W/840 DA2 ACO Abs	51	7700

Futura Abs Dali L1452 W145

NO.	CODE		W	LM
4338561	T3FABF-DALI	IP66 IK06 38W/840 DA2 ACO Abs	38	5600
4338562	T3FABG-DALI	IP66 IK06 46W/840 DA2 ACO Abs	46	6800
4338564	T3FABI-DALI	IP66 IK06 71W/840 DA2 ACO Abs	71	10600