

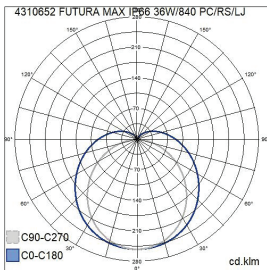


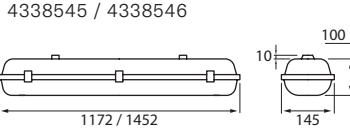

# Futura Max

An energy-efficient industrial luminaire for unheated warehouses, freezer rooms and premises with high temperatures. Resistant to fluctuations in the ambient temperature. Excellent impact strength. Wall brackets and lighting track brackets are available as accessories. Please also read about the other luminaires in the Futura range: Futura PC, Futura Abs ja Futura NB.

- Polycarbonate housing and opal diffuser, stainless steel latches.
- Grey.
- Protection class I.
- Surface mounting.
- Throughwired 5 x 2.5 mm<sup>2</sup>.
- Installation height 2–10 m.
- Integrated LED:
  - 1572 x 95 mm: 33 W / 4800 lm.
  - 1172 x 145 mm: 51 W / 8200 lm.
  - 1452 x 145 mm: 71 W / 11 300 lm.
- Colour temperature 4,000 K. CRI > 80 / Ra > 80.
- MacAdam 3 SDCM.
- IP66.
- IK10.
- On/off.
- Ambient temperature range -40 ... 60 °C.
- Rated lifetime L80 50,000 h (Ta60°C).
- Power source service life 50,000 h.
- PC = polycarbonate.

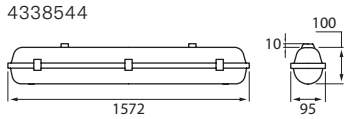

By order

Futura Max				
NO.	CODE		W	LM
4338544	T3FMBA	IP66 IK10 33W/840 PCO Max	33	4800
4338545	T3FMBB	IP66 IK10 51W/840 PCO Max	51	8200
4338546	T3FMBC	IP66 IK10 71W/840 PCO Max	71	11300