



Futura PC

A lighting solution range designed for industrial premises, warehouses, and parking facilities. Suitable for unheated spaces. Good impact-resistance. The range includes a wide range of lengths and widths. Wall brackets and lighting track brackets are available as accessories. Please also read about the other luminaires in the Futura range: Futura Abs, Futura NB and Futura Max.

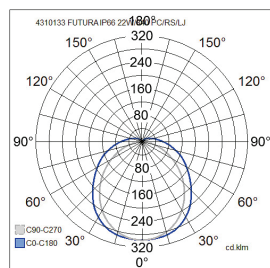

- Polycarbonate housing and opal diffuser, stainless steel latches.
- Grey.
- Protection class I.
- Surface mounting.
- Troughwired 5 x 2.5 mm².
- Installation height 2–10 m.
- Integrated LED 20–71 W / 2800–11 300 lm.
- Colour temperature 4,000 K. CRI > 80 / Ra > 80.
- MacAdam 3 SDCM.
- IP66.
- IK10.
- The standard range includes on/off and Dali-2 models.
- Ambient temperature range -25 ... 40 °C
- Rated lifetime L70 100,000 h (Ta40°C).
- Rated lifetime L80 100,000 h (Ta40°C).
- Rated lifetime L90 50 000 h (Ta40°C).
- Power source service life 100,000 h.
- PC = polycarbonate, DA2 = Dali-2.

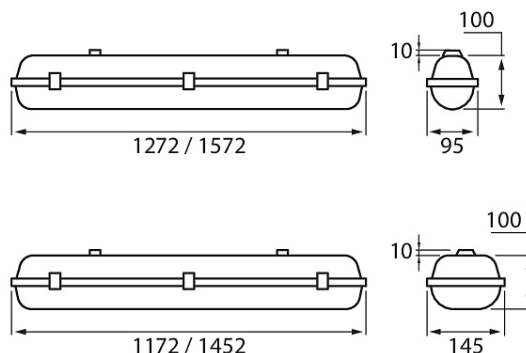

- Also available as Casambi, 1–10 V, Switch Dim and Radar solutions on a project-specific basis. CRI > 90 available for order.

By order, • in stock

Futura PC L1275 mm W95 mm

NO.	CODE	W	LM
4338565	T3FUPA IP66 IK10 20W/840 PCO	20	2800
4338566	T3FUPB IP66 IK10 27W/840 PCO	27	3900

Futura PC L1172 mm W145 mm

NO.	CODE	W	LM
4338523	T3FUPD IP66 IK10 37W/840 PCO	37	5900
4338526	T3FUPG IP66 IK10 51W/840 PCO	51	8200

Futura PC L1572 mm W95 mm

NO.	CODE	W	LM
4338522	T3FUPC IP66 IK10 33W/840 PCO	33	4800

Futura PC L1452 mm W145 mm

NO.	CODE	W	LM
4338524	T3FUPE IP66 IK10 38W/840 PCO	38	6000
4338525	T3FUPF IP66 IK10 46W/840 PCO	46	7300
4338527	T3FUPH IP66 IK10 71W/840 PCO	71	11300

Futura PC Dali L1275 mm W95 mm

NO.	CODE	W	LM
4338528	T3FUPA-DALI IP66 IK10 20W/840 DA2 PCO	20	2800
4338529	T3FUPB-DALI IP66 IK10 27W/840 DA2 PCO	27	3900

Futura PC Dali L1172 mm W145 mm

NO.	CODE	W	LM
4338531	T3FUPD-DALI IP66 IK10 37W/840 DA2 PCO	37	5900
4338534	T3FUPG-DALI IP66 IK10 51W/840 DA2 PCO	51	8200

Futura PC Dali L1572 mm W95 mm

NO.	CODE	W	LM
4338530	T3FUPC-DALI IP66 IK10 33W/840 DA2 PCO	33	4800

Futura PC Dali L1452 mm W95 mm

NO.	CODE	W	LM
4338532	T3FUPE-DALI IP66 IK10 38W/840 DA2 PCO	38	6000
4338533	T3FUPF-DALI IP66 IK10 46W/840 DA2 PCO	46	7300
4338535	T3FUPH-DALI IP66 IK10 71W/840 DA2 PCO	71	11300