





Greta Mini

An aluminium bollard luminaire for outdoor use. With its narrow housing, Greta Mini is ideal, for example, for the yards of residential buildings. The bollard luminaires, which are equipped with an efficient integrated LED, distribute light in four directions. Available in two colour temperatures. A model with an E27 fitting is also available. Read also about Airam's extensive selection of lamps. High-quality surface treatment, stainless steel screws.



- Aluminium housing and frosted polycarbonate diffuser (PCFR).
- Anthracite, silver, black and white.
- Protection class I.
- Not linkable, 3 x 2.5 mm².
- Installation: 1. Bolt fastening directly to a concrete slab.
2. Using ground support MTS-2N (4146704) together with ground support P (4107104) or or 3. Ground support MTS-2N (4146704) with a 60 mm concrete base on soft ground.
- Integrated LED 14 W / 500 lm.
- Colour temperatures 3,000 K and 4,000 K.
CRI > 80 / Ra > 80.
- E27 models LED lamp max 11W, not included.
- Lamp recommendations: Airam Frost led -range.
- IP65.
- IK08.
- On/off.
- Ambient temperature range -25 ... 35 °C
- Rated lifetime L70 100,000 h (Ta25°C).
- Power source service life 50,000 h.
- AN = anthracite, SI = silver, BK = black, WH = white,
FR = frosted diffuser.

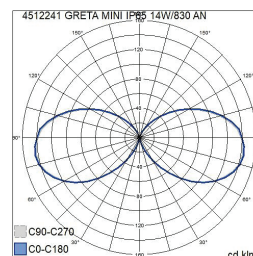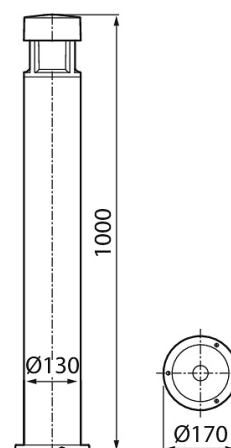

By order

Greta Mini led 830

NO.	CODE	W	LM
4512241	B5GMBF IP65 14W/830 PCFR AN H1100	14	500
4512242	B5GMBC IP65 14W/830 PCFR SI H1100	14	500
4512243	B5GMBB IP65 14W/830 PCFR BK H1100	14	500
4512244	B5GMBA IP65 14W/830 PCFR WH H1100	14	500

Greta Mini led 840

NO.	CODE	W	LM
4512246	B5GMCF IP65 14W/840 PCFR AN H1100	14	500
4512247	B5GMCC IP65 14W/840 PCFR SI H1100	14	500
4512248	B5GMCB IP65 14W/840 PCFR BK H1100	14	500
4512249	B5GMCA IP65 14W/840 PCFR WH H1100	14	500

Greta Mini E27

NO.	CODE
4509948	B5GMAF IP65 E27 PCFR AN H1100
4509947	B5GMAC IP65 E27 PCFR SI H1100
4509946	B5GMAB IP65 E27 PCFR BK H1100
4509945	B5GMAA IP65 E27 PCFR WH H1100