






# Keto

A damp-resistant universal luminaire for warehouses, corridors and industrial facilities. The luminaire comes with an integrated LED, available in two colour temperatures. The range includes two housing lengths and output options. A protective mesh and wire-suspension fixture are available as an accessories.

- Steel housing and opal acrylic diffuser. Plastic end caps.
  - White, RAL 9016.
  - Protection class I.
  - Surface mounting.
  - Linkable, 3/5 x 2.5 mm<sup>2</sup>.
  - Installation height 2–5 m.
  - Integrated LED 41–52 W / 5,000–7,300 lm.
  - Colour temperatures 3,000 K and 4,000 K. CRI > 80 / Ra > 80.
  - MacAdam 3 SDCM.
  - IP44.
  - The standard range includes On/Off and Dali models.
  - Ambient temperature range 0 ... 25 °C.
  - Rated lifetime L70 100,000 h (Ta25°C).
  - Rated lifetime L80 50,000 h (Ta25°C).
  - Power source service life 50,000 h.
  - Wire-suspension fixture 4107113.
  - Protective mesh 1200 mm (4310173) and 1500 mm (4310174).
  - WH = white, DA = Dali.
- Also available as Casambi, 1–10 V, Switch Dim and Radar solutions on a project-specific basis. Also available with various connecting wire solutions. CRI > 90 available for order.

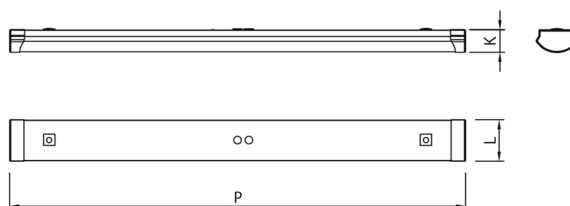

A protective meshes 1200 mm (4310173) and 1500 mm (4310174) are available as an accessories.

By order, • In stock

## Keto on/off

SNRO	KOODI		W	LM
• 4310168	D3KEAG	IP44 41W/830 ACO WH	41	5000
• 4310169	D3KEAH	IP44 41W/840 ACO WH	41	5000
• 4310170	D3KEAM	IP44 52W/830 ACO WH	52	7300
• 4310171	D3KEAN	IP44 52W/840 ACO WH	52	7300

## Keto Dali

SNRO	KOODI		W	LM
	D3KEAG-DALI	IP44 41W/830 DA ACO WH	41	5000
	D3KEAH-DALI	IP44 41W/840 DA ACO WH	41	5000
	D3KEAM-DALI	IP44 52W/830 DA ACO WH	52	7300
	D3KEAN-DALI	IP44 52W/840 DA ACO WH	52	7300