




Led Runko ABS

A luminaire designed for LED tubes that correspond to T8 fluorescent tubes. The durable empty housing for LED tubes is suitable for industrial facilities, warehouses, parking facilities, and agricultural spaces such as cattle shelters. Suitable for surface mounting. Read also about our LED Runko basic model and LED tube selection.

- ABS plastic housing, clear, structured acrylic diffuser (ACC) and stainless steel latches.
- Protection class I.
- For 1XG13 and 2XG13 LED tubes. We recommend LED tubes from the Airam Pro range.
- IP66.
- IK06.
- On/Off.
- Ambient temperature range: -30 ... 40 °C, or according to the selected lamp.

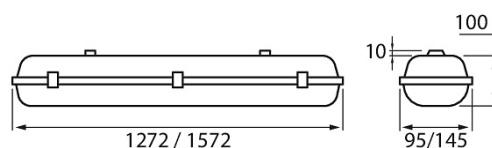

The installation plate is hung by wires during installation.

• In stock

Led Runko ABS

NO.	CODE
• 4310643	A3MRHA IP66 1X1200 ACC GR
• 4310644	A3MRJA IP66 1X1500 ACC GR
• 4310645	A3MRLA IP66 2X1200 ACC GR
• 4310646	A3MRMA IP66 2X1500 ACC GR