




Led-runko Basic

A luminaire designed for LED tubes that correspond to T8 fluorescent tubes. The cost-efficient empty housing for LED tubes is ideal for warehouses and industrial facilities where through-wiring is not needed. Good impact-resistance. The luminaires are suitable for surface mounting. Also read about our robust Led Runko Abs model and throughwired Led Runko models, as well as our range of LED tubes.

- Polycarbonate body and clear structured polycarbonate (PCC) diffuser.
- Latches are made of fibreglass.
- Protection class I.
- Surface mounting on a wall or ceiling. Suspended with fixtures included in the package.
- Installation height 2–5 m.
- Suitable for through-wiring, 5 x 2.5 mm².
- IP66.
- IK10.
- Max. 1/2 x 20/30 W. For 1XG13 and 2XG13 LED tubes. We recommend LED tubes from the Airam Pro range.
- Control: On/off.
- Ambient temperature range -30 ... 40 °C (or according to the selected lamp).

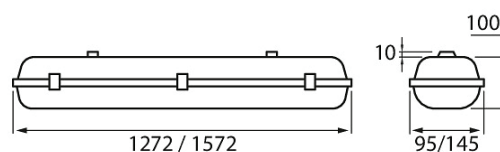

The installation plate is hung by wires during installation.

• In stock

Led-runko Basic

NO.	CODE
-----	------

- | | |
|-----------|---------------------------------|
| • 4310528 | T3MREB IP66 2X1200 PCC GR Basic |
| • 4310529 | T3MRFB IP66 2X1500 PCC GR Basic |