




## Led Runko

A luminaire designed for LED tubes that correspond to T8 fluorescent tubes. The cost-efficient empty housing for LED tubes is ideal for warehouses and industrial facilities. Good impact-resistance. Suitable for surface mounting. Read also about our robust LED Runko Abs model and range of LED tubes.

- Polycarbonate body and clear structured polycarbonate (PCC) diffuser, stainless steel latches.
- Protection class I.
- Surface mounting on a wall or ceiling. Suspended with fixtures included in the package.
- Throughwired, 5 x 2.5 mm<sup>2</sup>.
- For 1XG13 and 2XG13 LED tubes. We recommend LED tubes from the Airam Pro range.
- IP66.
- IK10.
- On/Off.
- Ambient temperature range -30 ... 40 °C, or according to the selected lamp.

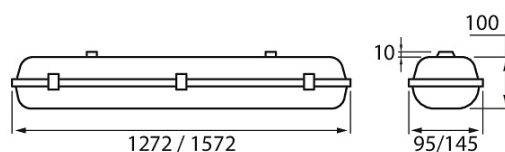

- In stock

### Led Runko

| NO. | CODE |
|-----|------|
|-----|------|

- |           |                           |
|-----------|---------------------------|
| • 4310131 | T3MREA IP66 2X1200 PCC GR |
| • 4310132 | T3MRFA IP66 2X1500 PCC GR |
| • 4310128 | T3MRBA IP66 1X1200 PCC GR |
| • 4310129 | T3MRCA IP66 1X1500 PCC GR |

