



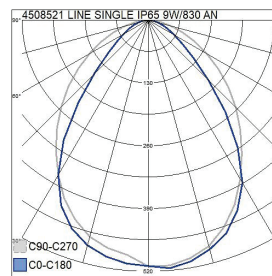

Line

Line is a wall luminaire designed for both indoor and outdoor use. The clean-lined design is particularly suitable for façades. High-quality surface treatment: The luminaire housing is coated with polyester paint that is resistant to corrosion and UV radiation, and the screws are made of stainless steel.

- Aluminium housing and frosted glass diffuser.
- Anthracite, silver, black and white.
- Protection class I.
- Surface mounting.
- Not linkable 3 × 2.5 mm².
- Installation height 0.5–4 m.
- Integrated LED 3000K 12W 600 lm, 4000K 12W 640 lm. CRI > 80 / Ra > 80.
- IP65.
- IK07.
- On/off.
- Ambient temperature range -25 ... 25 °C.
- Rated lifetime L70 50,000 h (Ta25°C).
- Power source service life 50,000 h.
- AN = anthracite, SI = silver, BK = black, WH = white.

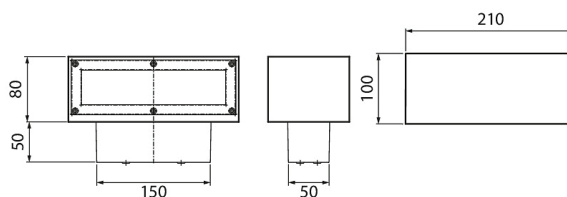

By order

Line 830

NO.	CODE		W	LM
4508521	B5LIDH	IP65 IK07 12W/830 GLFR AN	12	600
4508520	B5LIDG	IP65 IK07 12W/830 GLFR SI	12	600
4508519	B5LIDF	IP65 IK07 12W/830 GLFR BK	12	600
4508518	B5LIDE	IP65 IK07 12W/830 GLFR WH	12	600

Line 840

NO.	CODE		W	LM
4508402	B5LNCD	IP65 IK07 12W/840 GLFR AN	12	640
4508401	B5LNCC	IP65 IK07 12W/840 GLFR SI	12	640
4507499	B5LNCA	IP65 IK07 12W/840 GLFR WH	12	640
4508400	B5LNCB	IP65 IK07 12W/840 GLFR BK	12	640