




Medic

A special lighting solution for hospitals, industrial kitchens, and other public-space applications where IP65 protection and additional durability are required. Recessed mounting on a T-grid ceiling. The Medic luminaires have been certified in accordance with ISO 14644-1 standard and they have been granted the ISO 3 cleanroom classification.

- Steel housing and opal or micro-prismatic polystyrene diffuser (PSO or PSMP).
- White RAL9016.
- Protection class I.
- Recessed mounting.
- Linkable, 3/5 x 2.5 mm²
- The luminaire comes with IP65-classified connectors.
- Installation height: 2–5 m.
- Fixed LED: 23–55 W / 3,100–6,500 lm.
- Colour temperatures: 3,000 K and 4,000 K
CRI > 80 / Ra > 80.
- MacAdam 3 SDCM.
- IP65.
- The standard range includes on/off and Dali-2 models.
- Ambient temperature range: 0 ... 25 °C.
- Rated lifetime: L70 100 000 h (Ta 25 °C).
- Rated lifetime: L80 80 000 h (Ta25°C).
- The luminaire has an integrated power source. Power source lifespan: 100,000 h.
- Accessories: surface-mounting frame 600x600/143 mm (4245223) and recessed mounting frame 600x600 mm (4297811).
- WH = white, DA2 = Dali-2, PS = polystyrene, O = opal, MP = micro-prismatic optics.
- Also available as Casambi, 1–10 V and Switch Dim solutions. The colour temperature options available are: 2,700 K, 5,700 K and 6,500 K as well as Tunable White. CRI > 90 available by special order. Also available with various connecting wire solutions. The product can be customised for different efficacies. A model with 300x1200 mm and with an opal polycarbonate (PCO) diffuser is available by special order.

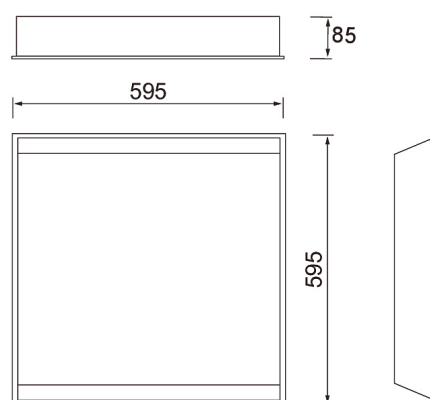

4245223
Surface mounting
frame 600x600mm



4297811
Recessed mounting frame
600X600

By order

Medic opal

NO.	CODE		W	LM
4222799	D2MEAA	IP65 23W/830 PSO WH	23	3100
4245200	D2MEAB	IP65 23W/840 PSO WH	23	3100
4245203	D2MEAC	IP65 32W/830 PSO WH	32	4100
4245204	D2MEAD	IP65 32W/840 PSO WH	32	4100
4245207	D2MEAE	IP65 55W/830 PSO WH	55	6500
4245208	D2MEAF	IP65 55W/840 PSO WH	55	6500

Medic microprismatic

NO.	CODE		W	LM
4245211	D2MECA	IP65 23W/830 PSMP WH	23	3100
4245212	D2MECB	IP65 23W/840 PSMP WH	23	3100
4245216	D2MECD	IP65 32W/840 PSMP WH	32	4100
4245219	D2MECE	IP65 55W/830 PSMP WH	55	6500
4245220	D2MEFF	IP65 55W/840 PSMP WH	55	6500

Medic Dali opal

NO.	CODE		W	LM
4245201	D2MEBA	IP65 23W/830 DA2 PSO WH	23	3100
4245202	D2MEBB	IP65 23W/840 DA2 PSO WH	23	3100
4245205	D2MEBC	IP65 32W/830 DA2 PSO WH	32	4100
4245206	D2MEBD	IP65 32W/840 DA2 PSO WH	32	4100
4245209	D2MEBE	IP65 55W/830 DA2 PSO WH	55	6500
4245210	D2MEBF	IP65 55W/840 DA2 PSO WH	55	6500

Medic Dali microprismatic

NO.	CODE		W	LM
4245213	D2MEDA	IP65 23W/830 DA2 PSMP WH	23	3100
4245214	D2MEDB	IP65 23W/840 DA2 PSMP WH	23	3100
4245217	D2MEDC	IP65 32W/830 DA2 PSMP WH	32	4100
4245218	D2MEDD	IP65 32W/840 DA2 PSMP WH	32	4100
4245221	D2MEDE	IP65 55W/830 DA2 PSMP WH	55	6500
4245222	D2MEDF	IP65 55W/840 DA2 PSMP WH	55	6500