



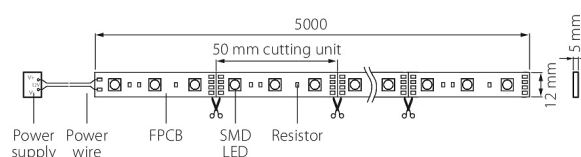

Norma 12V

The damp-proof and compact Norma LED strip comes into its own as a source of indirect light for facades and wet spaces. Suitable applications include offices, residential properties, hotels and building facades. With the Norma-strip, you can create a continuous line of light. A separate dimmer unit offers two control options: push button (Push dim) and Dali dimming control. The strips are available in two colour temperatures. By special request, the luminaire is available with the Casambi control system, cut to measure and installed inside a profile, when necessary.

- UV-protected silicone-coated LED strip, 12 V.
- Protection class III.
- Length 5 m.
- The maximum length of the continuous line of light 5 m.
- Connecting cable 1.5 m.
- Norma installation profiles are recommended for outdoor use. The product comes with a self-adhesive and a separate silicone fixture for surface mounting.
- Colour temperatures 3,000 K and 4,000 K.
- MacAdam 4 SDCM.
- IP65.
- 45 W / 5 m reel: 9 W, 700 lm/m.
- On/Off, push dim and Dali.
- Ambient temperature range -20 ... 25 °C.
- Rated life time L70 50,000 h (Ta25°C).
- Also available with the Casambi control system on a project-specific basis. Can also be cut to measure and installed in a profile, when necessary.

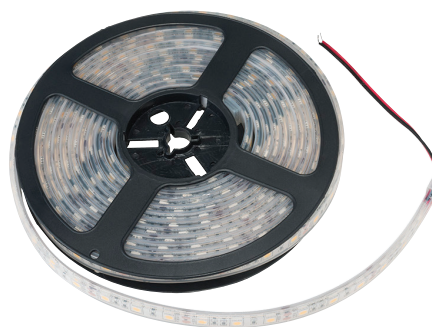

A galvanised steel installation profile 4289963 for Norma LED strips. The profile length is 1,670 mm.

• In stock

Norma 12V

NO.	CODE	W	LM
• 4209550	A2NOCA IP65 12V 9W/m 830 5m	45	3500
• 4209551	A2NOCB IP65 12V 9W/m 840 5m	45	3500

Norma 12V accessories

NO.	CODE
• 4209562	A2NOEA Accessory bag Norma
• 4209563	A2NOEB Bracket 10pce Norma

4209562



4209563

