


Plano

Plano is a cost-efficient modular luminaire that creates an even and pleasant light. The luminaire offers a long service life and a wide range of mounting options. It is ideal for lobbies, open-plan offices, corridors and other public spaces. A variety of installation accessories are available for the luminaire, including cover sheets for the round light opening and accessories for surface and recessed mounting.

- Aluminium frame, steel housing, polystyrene diffuser and acrylic lenses.
- White, RAL 9016.
- Luminaire protection class III.
- LED driver protection class II.
- Mounting on a T-grid ceiling, recessed and surface mounting with accessories.
- Linkable: On/off and Dali-2 max 5 x 2,5 mm², Casambi 3 x 2,5 mm², Dim 3 x 1,5 mm².
- Colour temperature 4000 K. CRI > 80 / Ra > 80.
- MacAdam 3 SDCM.
- IP20.
- IK02.
- On/off: 28 W 2800 lm / 36 W 3600 lm.
- Dim: 32 W 3200 lm.
- Dali-2 and Casambi: 28 W 2800 lm / 36 W 3600 lm.
- On/off, Dali-2 with direct pushbutton control 230V, Casambi (Bluetooth mesh), Dim (trailing-edge dimming) and CLO-functions.
- On/off and Casambi ranges also available with 3-meter Europlug cable H03VVH2-F 2 x 0.75 mm².
- Use with Dali-2-certified control devices is recommended.
- Maximum number of led drivers to be connected to one switch is 60 pcs. The length of the cable between the switch and the luminaire is max. 10 meters.
- Ambient temperature range 0 ... 25 °C.
- Rated lifetime L70B50 100 000 h (Ta25°C).
- Rated lifetime L80B10 60 000 h (Ta25°C).
- Rated lifetime L90B10 35 000 h (Ta25°C).
- Power source lifespan 100 000 h.
- A white surface-mounting frame (4245223) and flush mounting frame 600 x 600 (4297811) available as accessories. Cover sheets R400 (A2PLZC) and R500 (A2PLZA) for the round opening are also available.
- WH = white, DA2 = Dali-2, CA = Casambi, EU = Euro plug-in, PSO = polystyrene, opal, DIM = phase-cut dimming.
- Cut-to-measure cables and a variety of quick-connector cable sets can be ordered on a project-specific basis.

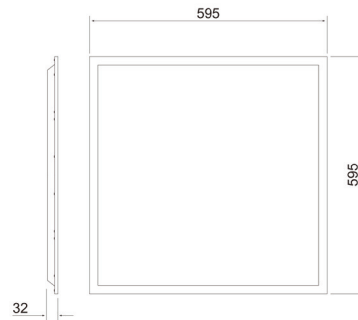

By order, • In stock

Plano on/off

NO.	CODE		W	LM
• 4146829	A2PLAB	IP20 28W/840 PSO WH	28	2800
• 4146831	A2PLAD	IP20 36W/840 PSO WH	36	3600

Plano Dim

NO.	CODE		W	LM
• 4146833	A2PLAF	IP20 32W/840 PSO DIM WH	32	3200

Plano Dali



NO.	CODE		W	LM
• 4146835	A2PLAB-DALI	IP20 28W/840 PSO DA2 WH	28	2800
• 4146837	A2PLAD-DALI	IP20 36W/840 PSO DA2 WH	36	3600

Plano Casambi

NO.	CODE		W	LM
	A2PLAB-CA	IP20 28W/840 PSO CA WH	28	2800
4146838	A2PLAD-CA	IP20 36W/840 PSO CA WH	36	3600

Amount of drivers per MCB

MCB	B10A	B16A	C10A	C16A
On/off 28 W	10	16	16	27
On/off 36 W	10	16	16	27
Dim 32 W	10	16	16	27
Dali-2	29	47	48	80
Casambi	14	23	23	38

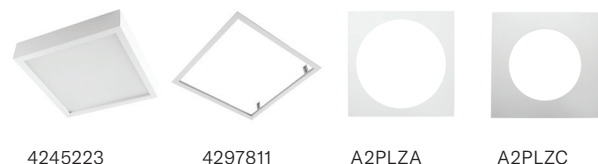

PSO

