






Profi L

A luminaire range designed for offices and other public spaces. Available in two housing lengths and widths. The range includes two colour temperatures and several output options. You can choose from models with one or two matte anti-glare shields. Suspension or surface mounting. Wire-suspension fixture 4146595 is available as an accessory.

- Steel housing, aluminium anti-glare shield, matt.
- White, RAL 9003.
- Protection class I.
- Suspension or surface mounting.
- Linkable 3 x 2,5 mm², Dali-models 5 x 2,5 mm².
- Integrated LED 19–58 W, 2,250–7,200 lm.
- Colour temperatures 3,000 K and 4,000 K. CRI > 80 / Ra > 80.
- MacAdam 3 SDCM.
- IP20.
- The standard range includes on/off and Dali models.
- Ambient temperature range 0 ... 25 °C.
- Rated lifetime L70 100,000 h (Ta25°C).
- Rated lifetime L80 80,000 h (Ta25°C).
- Power source service life 50,000 h.
- WH = white, DA = Dali.
- Also available with Casambi, 1–10 V and push-button control (230V). CRI > 90 available for order. Also available with various connecting wire solutions and a pull switch (on/off and Dali).

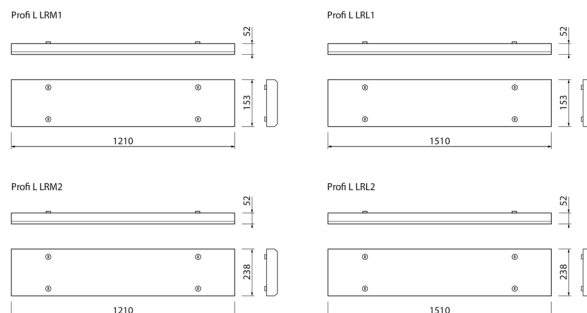

Wire suspension.

By order, • in stock

Profi L on/off

NO.	CODE	W	LM
4289666	D2PRAA	1210x153 IP20 19W/830 AL MA WH	19 2250
4289667	D2PRAB	1210x153 IP20 19W/840 AL MA WH	19 2250
4289668	D2PRBA	1510x153 IP20 30W/830 AL MA WH	30 3500
4289669	D2PRBB	1510x153 IP20 30W/840 AL MA WH	30 3500
4289670	D2PRCA	1210x238 IP20 37W/830 AL MA WH	37 4450
• 4289671	D2PRCB	1210x238 IP20 37W/840 AL MA WH	37 4450
4289672	D2PREA	1510x238 IP20 41W/830 AL MA WH	41 5350
• 4289673	D2PREB	1510x238 IP20 41W/840 AL MA WH	41 5350
4289674	D2PREG	1510x238 IP20 58W/830 AL MA WH	58 7200
• 4289675	D2PREH	1510x238 IP20 58W/840 AL MA WH	58 7200

Profi L Dali

NO.	CODE	W	LM
	D2PRAA-DALI	1210x153 IP20 19W/830 DA AL MA WH	19 2250
	D2PRAB-DALI	1210x153 IP20 19W/840 DA AL MA WH	19 2250
	D2PRBA-DALI	1510x153 IP20 30W/830 DA AL MA WH	30 3500
	D2PRBB-DALI	1510x153 IP20 30W/840 DA AL MA WH	30 3500
	D2PRCA-DALI	1210x238 IP20 37W/830 DA AL MA WH	37 4450
	D2PRCB-DALI	1210x238 IP20 37W/840 DA AL MA WH	37 4450
	D2PREA-DALI	1510x238 IP20 41W/830 DA AL MA WH	41 5350
•	D2PREB-DALI	1510x238 IP20 41W/840 DA AL MA WH	41 5350
	D2PREG-DALI	1510x238 IP20 58W/830 DA AL MA WH	58 7200
	D2PREH-DALI	1510x238 IP20 58W/840 DA AL MA WH	58 7200