



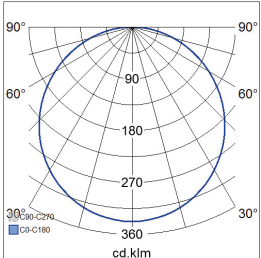

Ronda

The modern Ronda is a Triac-controlled ceiling and wall luminaire with an aluminium body. This stylish and low-profile round luminaire is an ideal choice for the ceilings of residential properties, corridors and cupboards. The luminaire is easy to install directly on the junction box. Its installation height is 2–4 m. This linkable luminaire is equipped with spring terminal blocks. Dali versions are available by special order.

- Aluminium body and opal polycarbonate diffuser.
- White, RAL9003.
- Protection class II.
- Surface mounting on a wall or ceiling.
- Linkable: dimmable and Casambi-versions max 3 x 2,5 mm²; Dali-2 versions 5 x 2,5 mm².
- Installation height 2-4 m.
- Colour temperature: 3,000 K and 4,000 K.
- MacAdam 4 SDCM.
- IP20.
- Fixed LED 12 W / 900 lm, 15 W / 1,200 lm, 21 W / 1,700 lm.
- Dimming: rising- and trailing-edge control, Dali-2 with push-button control (230 V) and Casambi.
- Ambient temperature range 0 ... 25 °C.
- Rated lifetime L70 60,000 h (Ta25°C).

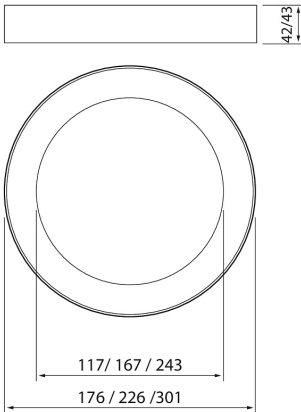

By order, • In stock

Ronda

| NO. | CODE | | W | LM |
|-----------|--------|-----------------------------|----|------|
| • 4297867 | A2RODA | 175 IP20 12W/830 DIM PCO WH | 12 | 900 |
| • 4297868 | A2RODB | 175 IP20 12W/840 DIM PCO WH | 12 | 900 |
| • 4297869 | A2RODC | 225 IP20 15W/830 DIM PCO WH | 15 | 1200 |
| • 4297870 | A2RODD | 225 IP20 15W/840 DIM PCO WH | 15 | 1200 |
| • 4297871 | A2RODE | 300 IP20 21W/830 DIM PCO WH | 21 | 1700 |
| • 4297872 | A2RODF | 300 IP20 21W/840 DIM PCO WH | 21 | 1700 |

Ronda Dali

| NO. | CODE | | W | LM |
|-----|-------------|-----------------------------|----|------|
| | A2RODA-DALI | 175 IP20 12W/830 DA2 PCO WH | 12 | 900 |
| | A2RODB-DALI | 175 IP20 12W/840 DA2 PCO WH | 12 | 900 |
| | A2RODC-DALI | 225 IP20 15W/830 DA2 PCO WH | 15 | 1200 |
| | A2RODD-DALI | 225 IP20 15W/840 DA2 PCO WH | 15 | 1200 |
| | A2RODE-DALI | 300 IP20 21W/830 DA2 PCO WH | 21 | 1700 |
| | A2RODF-DALI | 300 IP20 21W/840 DA2 PCO WH | 21 | 1700 |

Ronda Casambi

| NO. | CODE | | W | LM |
|-----|-----------|----------------------------|----|------|
| | A2RODA-CA | 175 IP20 12W/830 CA PCO WH | 12 | 900 |
| | A2RODB-CA | 175 IP20 12W/840 CA PCO WH | 12 | 900 |
| | A2RODC-CA | 225 IP20 15W/830 CA PCO WH | 15 | 1200 |
| | A2RODD-CA | 225 IP20 15W/840 CA PCO WH | 15 | 1200 |
| | A2RODE-CA | 300 IP20 21W/830 CA PCO WH | 21 | 1700 |
| | A2RODF-CA | 300 IP20 21W/840 CA PCO WH | 21 | 1700 |