

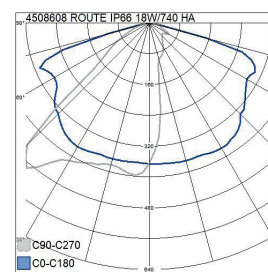


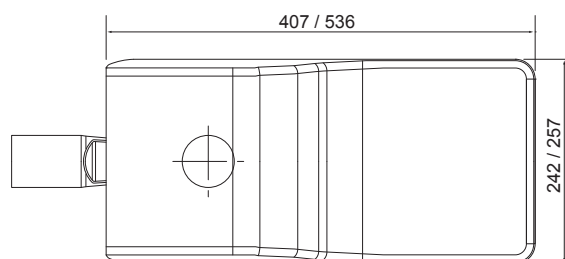

Route

Equipped with high-quality optics, Route is designed for illuminating outdoor spaces and small roads. It is also an ideal choice for yards, car parks and jogging paths. Route is equipped with an energy-saving and convenient night dim function that automatically dims the light at night. The range offers several power options. The Route luminaire has a long service life. It is mounted on a pole or a lighting beam.

- Pressure cast aluminium body and hardened glass diffuser.
- The beam angle can be adjusted between 0 and 10 degrees in increments of five degrees.
- Grey, RAL 7035.
- Protection class I.
- IP66.
- IK08.
- Colour temperature 4,000 K. CRI > 70 / Ra > 70.
- Fixed LED as the standard option, 18 W/2,300 lm, 27 W/3,500 lm, 36 W/4,600 lm, 54 W/6,900 lm.
- MacAdam 5 SDCM.
- Dynadimmer 5 steps, 1–10V, CLO as the standard option. Nema, Zhaga compliance.
- Mounting on a pole or a lighting beam (48–60 mm). Comes with an 8 mm, 3 x 1.5 mm² rubber cable.
- Installation height 3–10 m.
- Wind catchment area: Route S 0.031 m², Route M 0.043 m².
- Ambient temperature range -40 ... 55 °C.
- Rated lifetime L70 100,000 h.
- Rated lifetime L80 100,000 h.
- Rated lifetime L90 60,000 h.
- Power source lifetime 100,000 h.
- A wide range of cables, optics and sensors are available by special order. 81 W/10,300 lm and 107 W/13,650 lm available by special order as well as 1-10V control options.



By order, • In stock

Route S

NO.	CODE		W	LM
• 4508608	A5ROUA	ROUTE S IP66 18W/740 GR	18	2300
• 4508609	A5ROUB	ROUTE S IP66 27W/740 GR	27	3520
• 4508610	A5ROUC	ROUTE S IP66 36W/740 GR	36	4600
• 4508611	A5ROUD	ROUTE S IP66 54W/740 GR	54	6900

Route M

NO.	CODE		W	LM
• 4508612	A5ROUE	ROUTE M IP66 81W/740 GR	81	10300
	A5ROUF	ROUTE M IP66 107W/740 GR	107	13650