



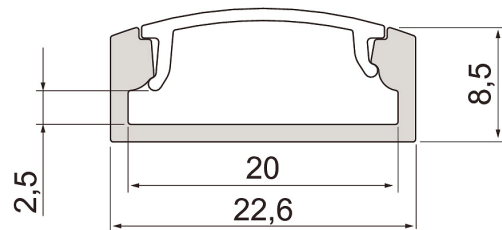

Slimline 8 Wide

Slimline 8 Wide is a clean-lined, low aluminium profile for LED strips with a maximum width of 20 mm. The wide profile is also compatible with Apus quick connectors. Surface mounting on a ceiling, on a wall, or beneath worktops. A bracket and end pieces with or without wire opening are available as accessories. Slimline 8 Wide R is available for recessed mounting.

- Anodised aluminium body, transparent or opal UV-protected polycarbonate diffuser.
- Suitable for use with Apus, Norma and Coloris (IP20) LED strips and with ballasts compatible with them.
- When used with the diffuser and end caps available as accessories, the profile meets the IP21 protection class requirements.
- The profile is available in 1 m and 2 m lengths and with a clear or opal diffuser.
- End caps and mounting brackets are available as accessories.
- Custom-made profile lengths (max. 6 m) are available on a project-specific basis.
- Check the compatibility table for our LED strips and profiles.

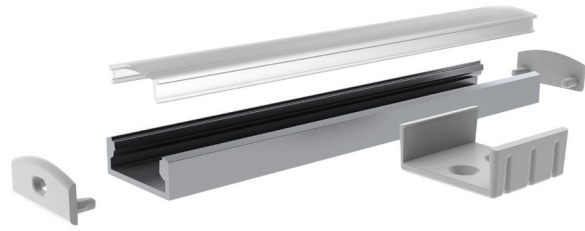

By order , • In stock

Slimline 8 Wide

NO.	CODE	
4222744	L2ALTA	Profile 1m AL PCC 8 Wide
4222745	L2ALTB	Profile 1m AL PCO 8 Wide
4222746	L2ALTC	Profile 2m AL PCC 8 Wide
• 4222747	L2ALTD	Profile 2m AL PCO 8 Wide

Slimline 8 Wide Accessories

NO.	CODE	
• 4222748	L2ALUA	End cap 8 Wide
• 4222749	L2ALUB	End cap w/hole 8 Wide
• 4222750	L2ALUC	Bracket 8 Wide

