

Vario

Developed and manufactured in Finland, Vario is a surface-mounted aluminium profile luminaire. The material used in the body is 100% recycled aluminum. Thanks to the variety of housing lengths and a wide range of corner pieces, you can create a customised lighting solution that meets your needs. Typical applications include offices, lobbies, educational institutions and corridors. With this luminaire, you can create a seamless line of light of up to 4,500 mm. The 100% Finnish Vario luminaires are designed and manufactured at Airam's factory in Lahti.

- Aluminium housing and acrylic diffuser; microprism (ACMP), opal (ACO) or with lens optics (ACC).
- White, RAL 9016.
- Protection class I.
- Surface mounting on the ceiling. Connection in a separate box. The luminaire will be delivered with a two-meter connection cable (3/5 x 0,75 mm²).

- Lens optic:

1140 mm / 24 W: WH/WH / 3700 lm. WH/BK 3300 lm.

1420 mm / 30 W: WH/WH / 4700 lm. WH/BK 4200 lm.

- Opal:

1140 mm: 24 W / 3100 lm.

1420 mm: 30 W / 3900 lm.

4500 mm: 92 W / 12 500 lm.



- Mikroprisma:

1140 mm: 24 W / 3100 lm.

1420 mm: 30 W / 3900 lm.

4500 mm: 92 W / 12 500 lm.

- Colour temperature 4,000 K. CRI > 80 / Ra > 80.
- MacAdam 3 SDCM.
- IP20.
- IK02.
- On/off and Dali-2 models, with push-button control (230V).
- Ambient temperature range 0 ... 25 °C.
- Rated lifetime L70 > 100 000 h (Ta25°C).
- Rated lifetime L80 100 000 h (Ta25°C).
- Power source service life 100,000 h.
- WH = white housing, WH/WH = white housing + white diffuser, WH/BK = white housing + black diffuser.
- EPD document is available for product 4146889 in the product range.

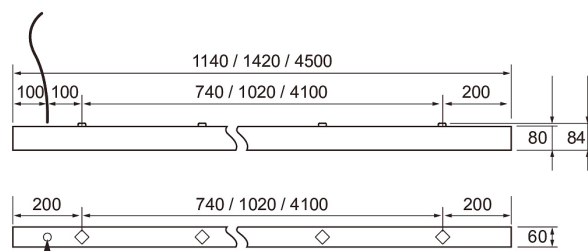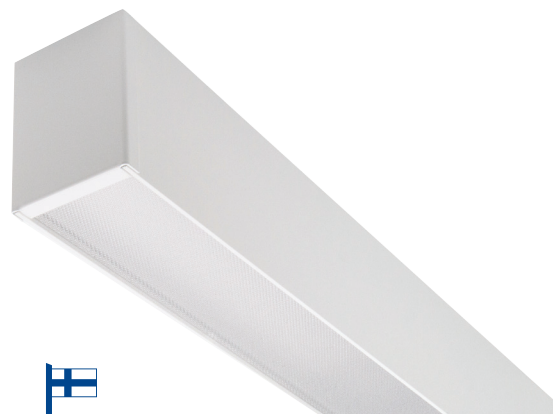


Quick installation using the surface mounting bracket.



RAL Classic colours for the housing are available by order.

- Casambi and ActiveAhead models are available on a project-specific basis. You can also have a luminous flux package customised to your needs. Through-wiring, customised input locations, cut-to-measure cables with quick connectors and various quick-connector cable sets are available by special order. The colour temperature options available are 3000 K and Tunable White. CRI > 90 / Ra > 90 also available. RAL Classic colours for the housing are available to order. Different linear light solutions are available. Various lengths ranging from 600 mm to 4500 mm are also available by order.




Vario ACC



ACC WH/WH




ACC WH/BK



Vario ACO



ACO WH



Vario ACMP



ACMP WH

Vario Deep Optic – minimal glare values and discreet lighting



Vario DO luminaires are the perfect choice for all spaces where minimal glare values and discreet lighting are desired. The luminaire is particularly suitable for lighting office spaces, educational institutions, and other public spaces. The luminaires are designed with user comfort in mind; high-quality lenses and glare protection ensure that the light is evenly and discreetly distributed over the illuminated area (UGR value even below 15).

By order

Vario ACC

NO.	CODE		W	LM
4146940	A1VARM	1140 24W/840 60D ACC WH/WH	24	3700
4146941	A1VARN	1140 24W/840 60D ACC WH/BK	24	3300
4146942	A1VARO	1420 30W/840 60D ACC WH/WH	30	4700
4146943	A1VARP	1420 30W/840 60D ACC WH/BK	30	4200

Vario DO

NO.	CODE		W	LM
4146994	A1VADA	1140 31W/840 DO/80D WH/WH	31	5000
4146995	A1VADB	1140 31W/840 DO/80D WH/BK	31	4900
4146996	A1VADC	1420 37W/840 DO/80D WH/WH	37	6000
4146997	A1VADD	1420 37W/840 DO/80D WH/BK	37	5800

Vario ACO

NO.	CODE		W	LM
4146879	A1VARB	1140 24W/840 ACO WH	24	3100
4146880	A1VARD	1420 30W/840 ACO WH	30	3900
4146881	A1VARF	4500 92W/840 ACO WH	92	12500

Vario ACMP

NO.	CODE		W	LM
4146882	A1VARH	1140 24W/840 ACMP WH	24	3100
4146883	A1VARJ	1420 30W/840 ACMP WH	30	3900
4146884	A1VARL	4500 92W/840 ACMP WH	92	12500

Vario Dali ACC

NO.	CODE		W	LM
4146944	A1VARM-DALI	1140 24W/840 DA2 60D ACC WH/WH	24	3700
4146945	A1VARN-DALI	1140 24W/840 DA2 60D ACC WH/BK	24	3300
4146946	A1VARO-DALI	1420 30W/840 DA2 60D ACC WH/WH	30	4700
4146947	A1VARP-DALI	1420 30W/840 DA2 60D ACC WH/BK	30	4200

Vario Dali DO

NO.	CODE		W	LM
4146998	A1VADE	1140 31W/840 DO/80D DA2 WH/WH	31	5000
4146999	A1VADF	1140 31W/840 DO/80D DA2 WH/BK	31	4900
4147000	A1VADG	1420 37W/840 DO/80D DA2 WH/WH	37	6000
4147001	A1VADH	1420 37W/840 DO/80D DA2 WH/BK	37	5800

Vario Dali ACO

NO.	CODE		W	LM
4146885	A1VARB-DALI	1140 24W/840 ACO DA2 WH	24	3100
4146886	A1VARD-DALI	1420 30W/840 ACO DA2 WH	30	3900
4146887	A1VARF-DALI	4500 92W/840 ACO DA2 WH	92	12500

Vario Dali ACMP

NO.	CODE		W	LM
4146888	A1VARH-DALI	1140 24W/840 ACMP DA2 WH	24	3100
4146889	A1VARJ-DALI	1420 30W/840 ACMP DA2 WH	30	3900
4146890	A1VARL-DALI	4500 92W/840 ACMP DA2 WH	92	12500