

Compact Mini




The Compact Mini Kit with six luminaires is a ready-to-install set of small downlights. You can create aesthetic accent lighting with the slender luminaire's light beams, and adjust the atmosphere in the room through dimming. The luminaire has an excellent colour rendering and is available in three different colour temperatures. The small Compact Mini luminaire is suitable for recessed mounting in ceilings, window niches, cabinets and walls in any room at home, and with IP44 protection rating it can also be used in wet spaces. Along with the luminaires, the LED downlight set includes the power source and installation cables. Individual luminaires are available as accessories and can be used to expand the arrangement to include eight luminaires. The minimum number of luminaires in an installation is four. The quick connectors are spaced one meter apart from each other, and the first one is 2,5 m from the power source. The colour of the luminaire can be changed to black with a separate decorative bezel, that is available as an accessory.

- Aluminium housing, PMMA diffuser.
- White, RAL9003.
- Protection class II.
- Recessed mounting on a ceiling, cut out Ø 27 mm.
- Linkable, max 3 x 2,5 mm².
- Installation height 0,1–5 m.
- Colour temperatures 2700 K, 3,000 K and 4,000 K. CRI > 90 / Ra > 90.
- MacAdam 6 SDCM.
- IP20/IP44.
- IK02.
- Integrated LED 6 x 1,2 W / 6 x 72 lm.
- Dimming: leading- and trailing-edge control.
- Ambient temperature range 0 ... 25 °C.
- Rated life time L70 50,000 h (Ta25°C).
- Power source service life 50 000 h (Ta25°C).

• In stock

Compact Mini

NO.	CODE	W	LM
• 4146674	A1CMAA IP44 Kit 6x1,2W/927 45D DIM WH	9	432
• 4146675	A1CMAB IP44 Kit 6x1,2W/930 45D DIM WH	9	432
• 4146676	A1CMAC IP44 Kit 6x1,2W/940 45D DIM WH	9	432

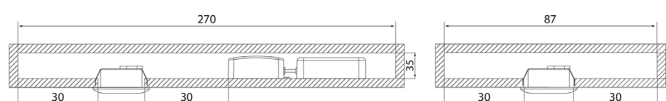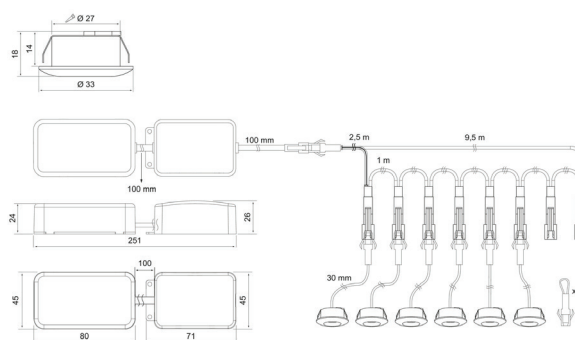



Compact Mini Accessories




The Compact Mini sold as an accessory allows you to expand the set of downlights to include up to eight luminaires with one driver. You can create aesthetic accent lighting with the slender luminaire's light beams, and adjust the atmosphere in the room through dimming. The luminaire has an excellent colour rendering and is available in three different colour temperatures. The small Compact Mini luminaire is suitable for recessed mounting in any room at home, and with IP44 protection rating it can also be used in wet spaces.

- Aluminium housing, PMMA diffuser.
- White, RAL9003.
- Protection class III.
- Recessed mounting on a ceiling, cut out Ø 27 mm.
- Not linkable.
- Installation height 0,1–5 m.
- Colour temperatures 2700 K, 3,000 K and 4,000 K. CRI > 90 / Ra > 90.
- MacAdam 6 SDCM.
- IP20/IP44.
- IK02.
- Integrated LED 1,2 W / 72 lm.
- Ambient temperature range 0 ... 25 °C.
- Rated life time L70 50,000 h (Ta25°C).

• In stock

Compact Mini Accessories

NO.	CODE	W	LM
• 4146677	A1CMBA IP44 1,2W/927 45D DIM WH	1	72
• 4146678	A1CMBB IP44 1,2W/930 45D DIM WH	1	72
• 4146679	A1CMBC IP44 1,2W/940 45D DIM WH	1	72

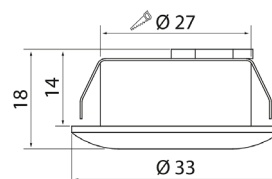

Compact Mini Bezel

The Compact Mini bezel is a replaceable accessory that allows you to change the colour of the luminaire to black. The bezel is easily switched to replace the standard white bezel by screwing. Sold in packs of six.

• In stock, * new product

Compact Mini Bezel

NO.	CODE
• 4146800	A1CMCA Bezel 45D BK 6pcs