



InduProof

InduProof is an energy-efficient industrial luminaire that comes equipped with a variety of features. LED module and power supply are replaceable, which gives the luminaire a long lifespan. The luminaire has a switch that allows you to change the luminous flux of the luminaire between four different options. The series has two different lengths and it can be installed on the surface or as a suspension installation, as well as on a horizontal wire. It is suitable for use in parking garages, storage facilities, and industrial assembly lines.

- Polycarbonate body and diffuser (PCO).
- Grey, RAL 7035.
- Protection class I.
- Surface mounting on a wall or ceiling, suspension mounting and horizontal suspension mounting possible with accessories.
- Throughwired 5 x 2,5 mm².
- Colour temperature 4000 K. CRI > 80 / Ra > 80.
- IP65.
- IK08.
- Integrated LED, on/off-models wattage can be adjusted on the luminaire:

1200 mm: 19 W / 3000 lm, 24 W / 3800 lm, 30 W / 4800 lm, 35 W / 5600 lm.

1500 mm: 26 W / 4160 lm, 33 W / 5280 lm, 38 W / 6080 lm, 45 W / 7200 lm.
- MacAdam 3 SDCM.
- On/off, Dali-2 with direct pushbutton control (230V) and Casambi control.
- Maximum number of led drivers to be connected to one switch is 20 pcs.
- Ambient temperature range -20 ... 40 °C.
- Rated lifetime L70 > 100 000 h (Ta25°C).
- Rated lifetime L80 > 100 000 h (Ta25°C).
- Rated lifetime L90 > 80 000 h (Ta25°C).
- Power source lifetime 100 000 h.

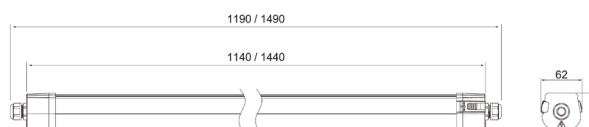

Wire suspension kit 4338607.



InduProof can be easily repaired if necessary.

Replaceable LED module and power supply

InduProof is an easily and quickly installed industrial luminaire with a replaceable LED module and power supply.

By order, • In stock

InduProof

NO.	CODE		W	LM
• 4338605	A3INDA	1200 IP65 5600lm 35W/840 PCO	35	5600
• 4338606	A3INDB	1500 IP65 7200lm 45W/840 PCO	45	7200

InduProof Dali

NO.	CODE		W	LM
	A3INDA-DALI	1200 IP65 5600lm 35W/840 PCO DA2	35	5600
	A3INDB-DALI	1500 IP65 7200lm 45W/840 PCO DA2	45	7200

InduProof Casambi

NO.	CODE		W	LM
	A3INDA-CA	1200 IP65 5600lm 35W/840 PCO CA	35	5600
	A3INDB-CA	1500 IP65 7200lm 45W/840 PCO CA	45	7200

InduProof Horizontal wire suspension kit

NO.	CODE	
• 4338607	A3VAIA	Horizontal wire suspension kit